

SPECIFICATION:


Rating	: 0.3A, 50V DC
Contact Resistance	: 30mΩ . (initial)
Insulation Resistance	: 100MΩ at 500V DC
Withstand Voltage	: 500V AC for 1 minute
Switching Life	: 10,000 Cycles (unloading/15-18 Cycles per minute)

小型スライドスイッチ

SS12D01G4




参考資料

1P2T




SS12D01G4

Optional knob size (L)
G : 2 - 7mm






HOLE LAYOUT $\oplus 0.05$

1P2T




SS12D07VG

Optional knob size (L)
VG : 2 - 6mm (standard : 2, 4, 6mm)

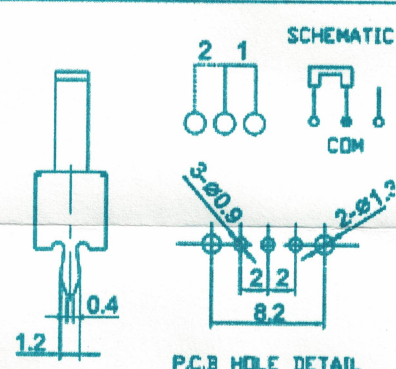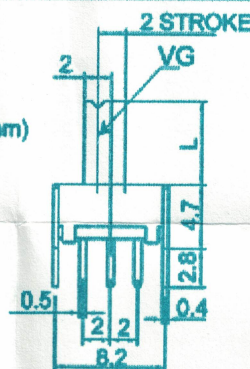




P.C.B HOLE DETAIL

1P2T




SS12F15G

Optional knob size (L)
G : 2-11mm

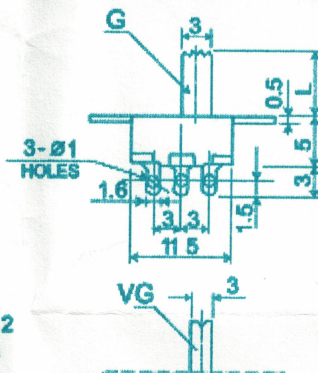




HOLE LAYOUT $\oplus 0.05$

1P2T



SS12F16G

Optional knob size (L)
G : 3-12mm
VG : 3-12mm

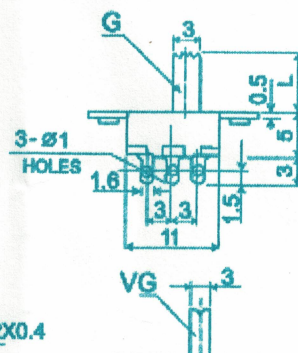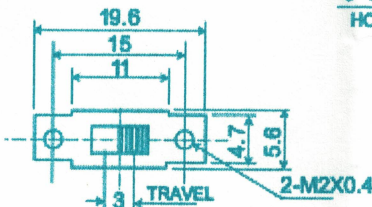

HOLE LAYOUT $\oplus 0.05$